





PS-1F Flush-Mount Power Supply

Features

The Telex® Audicom® Model PS-1F Power Supply mounts in a standard two-gang electrical outlet box. It may be used to power a single intercom channel containing up to 5 beltpack headset stations.

Line Drawing

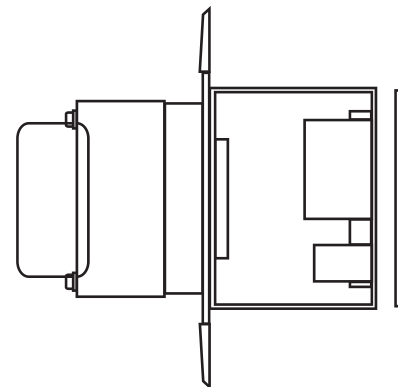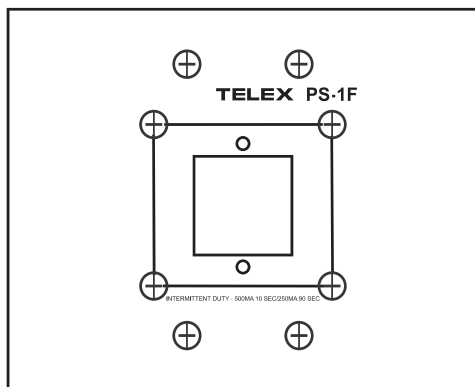

PS-1F Specifications

General

Power Requirements

105-125 Vac, 50-60 Hz, 30 watts

Output Voltage

24 Vdc regulated (less than 50 millivolts ripple)

Output Current

500 milliamps maximum continuous

700 milliamps maximum intermittent

240 milliamps short circuit current limiting

Channel Terminating Impedance (provided by PS-1F)

300 ohms \pm 15%

Connectors:

Intercom Channel

Three screw terminals with wire clamps for No.14-22 AWG stranded or solid wire

Power

Three wire pigtails

Ordering Information

PS-1F

Flush-Mount Power Supply

Catalog Number: 92890000

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.